



# 651F

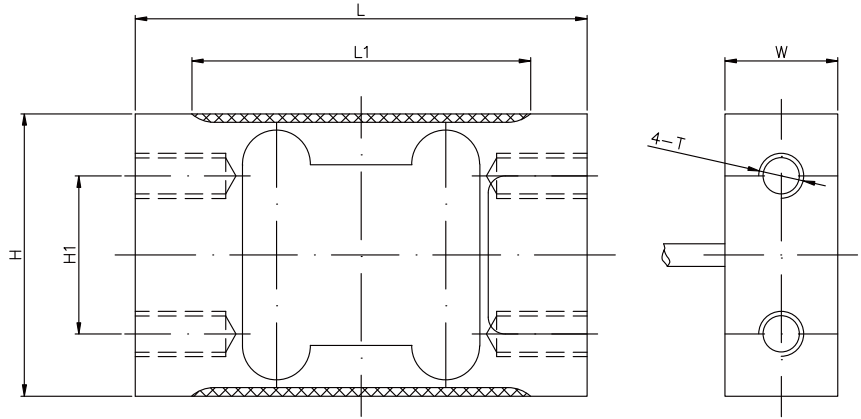

ALUMINUM  
铝合金

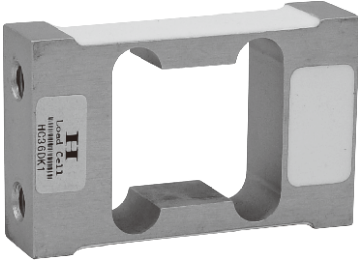

## 尺寸 DIMENSIONS

Rate Capacity  
量程

	L	L1	W	H	H1	T
kg/mm						
4-20	80	60	20	50	28	M8深12
lb/inches(conversion of above dimensions 由以上尺寸转换)						
8.82-44.09	3.15	2.36	0.79	1.97	1.1	M8DP0.47

## 技术参数 SPECIFICATIONS

Full Scale Output 灵敏度输出	$1.0 \pm 20\% \text{mV/V}$	Recommended Excitation 使用电压	10V(15V Maximmm)
Zero Balance 零点输出	$\pm 0.04 \text{mV/V}$	Reference Max.Platform Size 最大秤台尺寸	200*200mm
Nonlinearity 非线性	$< \pm 0.017\%$	Insulation Resistance 绝缘阻抗	$> 2[50 \text{V DC}] \text{G}\Omega$
Repeatability 重复性	$< \pm 0.017\%$	Nominal Temperature Range 工作温度	$-10^\circ\text{C}$ to $40^\circ\text{C}$ / $14^\circ\text{F}$ to $104^\circ\text{F}$
Hysteresis Error 滞后	$< \pm 0.017\%$	Safe Overload 安全过载	150% of full scale
Creep in 30 min 30分钟蠕变	$< \pm 0.02\%$	Breaking Overload 极限过载	200% of full scale
Input Resistance 输入电阻	$405 \Omega \pm 10$	IP Rating 防护等级	IP66
Output Resistance 输出电阻	$350 \Omega \pm 3$	Cable Color Code 颜色码	Exc(输入)+:Red(红);Exc(输入)-:Black(黑);Sig(输出)+:Green(绿);Sig(输出)-:Whit白 Shield Bare(屏蔽)
Element Materia 材质	Aluminum 铝合金		

## 651F

Special Features  
特征

- ◆ 符合OIML认证指标
- ◆ Complies with OIML R60 C3 regulations
- ◆ 角差修正
- ◆ Off-center load compensated
- ◆ 单点式200\*200mm台面
- ◆ Single point 200\*200mm platform
- ◆ Ip66防护
- ◆ IP66 protection
- ◆ 适用于电子计价秤, 电子打包秤以及其它电子称重设备
- ◆ Suitable for electronic pricing scale, electronic package scale and other electronic weighing devices"